



### TWO LANE ROAD

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF OF CENTERLINE

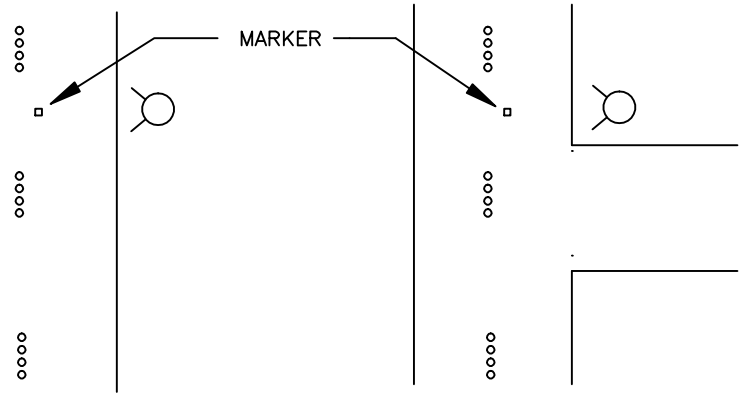


### ON SIDE STREETS

WHERE THE HYDRANT IS WITHIN 20' OF THE MAIN TRAVELED STREET, THE MARKER IS TO BE INSTALLED ON THAT MAIN STREET AND 4" TO 6" OFF THE CENTERLINE.

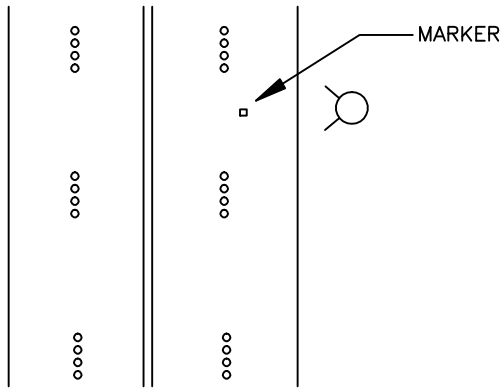

### FOUR LANE ROAD

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF OF DOTS OR PAINTED LANE DIVIDER.

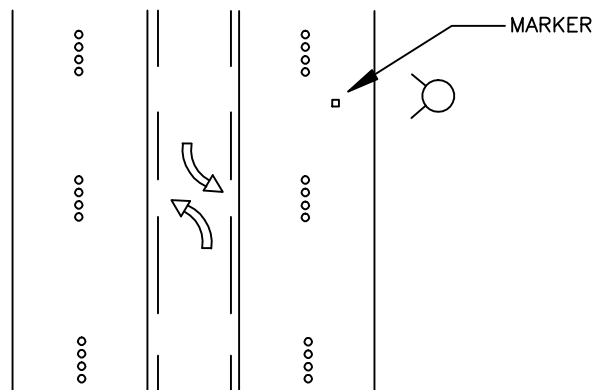

### FIVE LANE ROAD

OFFSET MARKER TO INDICATE WHICH SIDE OF STREET HYDRANT IS ON. MARKER TO BE PLACED 4" TO 6" OFF OF DOTS OR PAINTED LANE DIVIDER.

### NOTE:

MARKER: TYPE 88 AB STIMSONITE TWO WAY (BLUE)



APPROVED BY	L. OLIVE
DATE	07/31/2008
REF STAD SPEC	

DEPARTMENT OF PUBLIC WORKS <b>STANDARD DETAILS</b>
<b>FIRE HYDRANT MARKER</b>

STANDARD DETAIL NUMBER
<b>W-015</b>