


WATER AND SEWER NOTES:

- 1 FIRE HYDRANT ASSEMBLY PER COA STD PLAN W-010. SET HYDRANT 3' FROM BACK OF SIDEWALK WHERE PRESENT.
- 2 COMMERCIAL WATER SERVICE PER COA STD DETAIL W-050. INSTALL ENTIRE SERVICE EXCEPT METER. SET METER BOX AT EXISTING GRADE THEN BURY UNDER 2' DEPTH PILE OF SOIL FOR PROTECTION. METER TO BE INSTALLED AT LATER DATE BY THE CITY.
- 3 SANITARY SIDE SEWER PER COA STD DETAIL SS090 AND DETAIL. MAINTAIN 7' MINIMUM COVER AT PROPERTY LINE.
- 4 ADJUST WATER METER BOX TO GRADE.
- 5 NOT USED.
- 6 2" BLOW OFF ASSEMBLY PER COA STD PLAN W-180.
- 7 APPROXIMATE UTILITY LOCATION CONTRACTOR TO LOCATE UTILITIES PRIOR TO BEGINNING EXCAVATION. NOTIFY ENGINEER OF CONFLICTS.
- 8 TAPPING TEE PER COA STD PLAN W-200.
- 9 SANITARY SEWER MANHOLE PER COA STD DETAIL SS-010.
- 10 FILL LOW AREA WITH GRAVEL BORROW TO PROVIDE MIN 3.0' COVER OVER WATERLINE 10.0' MIN ON EACH SIDE OF WATER MAIN. CONSTRUCT IN ACCORDANCE WITH SECTION 2-03.3(14) OF THE STANDARD SPECIFICATIONS SEE DETAIL, SHEET WS11.
- 11 SAWCUT EXISTING PAVEMENT, SIDEWALK OR CURB AND GUTTER.
- 12 PAVEMENT RESTORATION PER DETAIL COA STD PLAN R-140.

GENERAL NOTE:

SEE WATER AND SEWER GENERAL NOTES ON SHEET WS11.

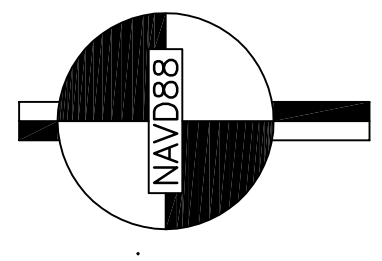

CALL 2 BUSINESS DAYS BEFORE YOU DIG
 1 800 424-5555
 UTILITIES UNDERGROUND LOCATION CENTER

<p>Perteet 425-252-7700 1-800-615-9900 2707 Colby Avenue, Suite 900 Everett, Washington 98201</p>	<p>CITY OF ARLINGTON APPROVED FOR CONSTRUCTION JAMES KELLY, PE PUBLIC WORKS DIRECTOR 05-16-13 DATE APPROVED</p>	100% SUBMITTAL		SCALE Horiz 1"=20' Vert 1"=20' Project Number 20110044	Date 5/31/13 Drawn By MMC Designed By EE Checked By JCS Approved By	Drawing No. WS7 Sheet No.	CITY OF ARLINGTON 173RD STREET NE EXTENSION WATER & SEWER PLAN