




**SIGN INSTALLATION
(FILL SECTION)**

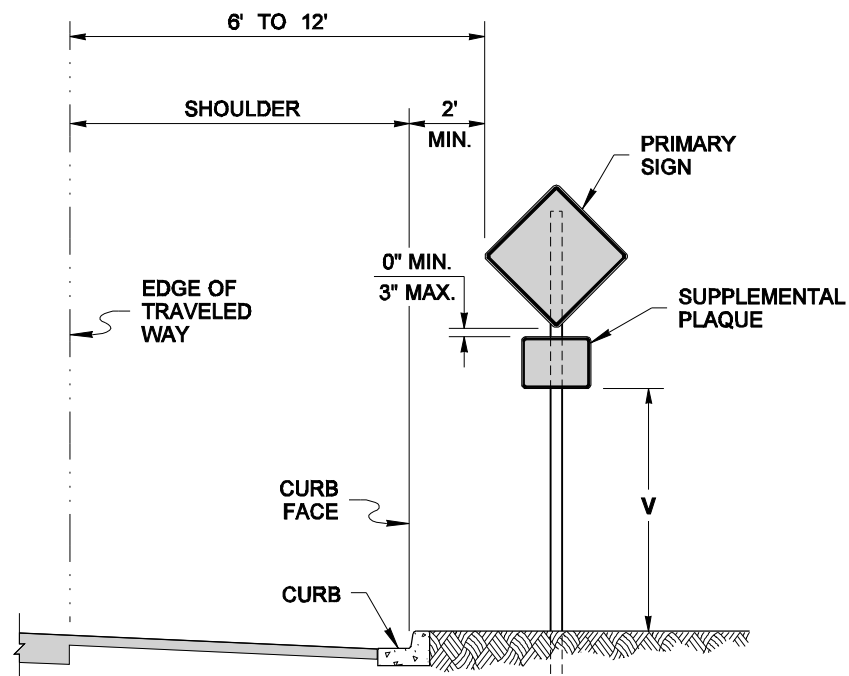


**SIGN INSTALLATION
(CURB SECTION)**

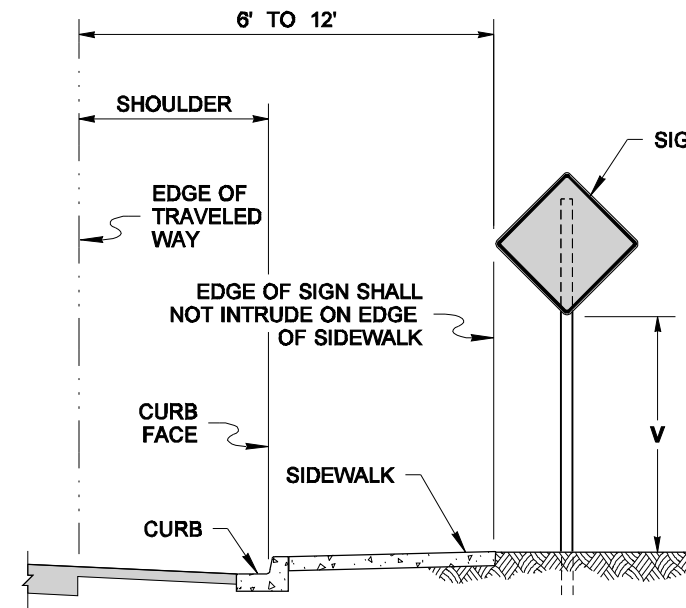


**SIGN INSTALLATION
(SIDEWALK AND CURB SECTION)**

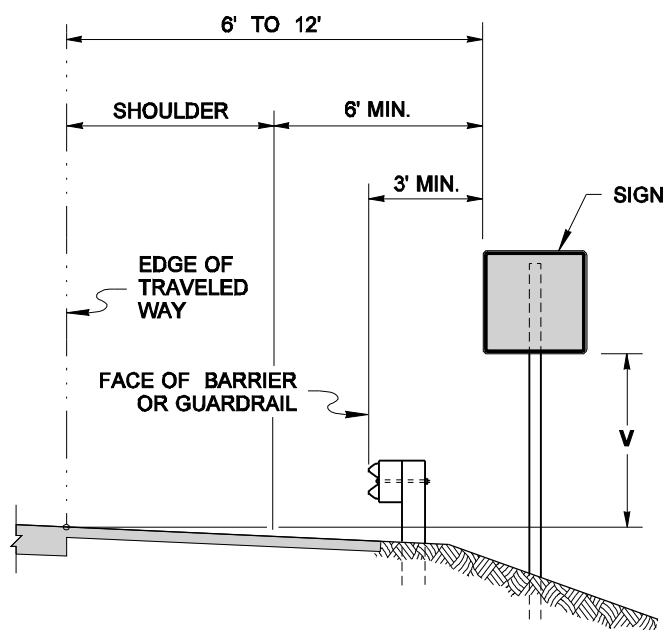

**SIGN INSTALLATION
(BEHIND TRAFFIC BARRIER)**

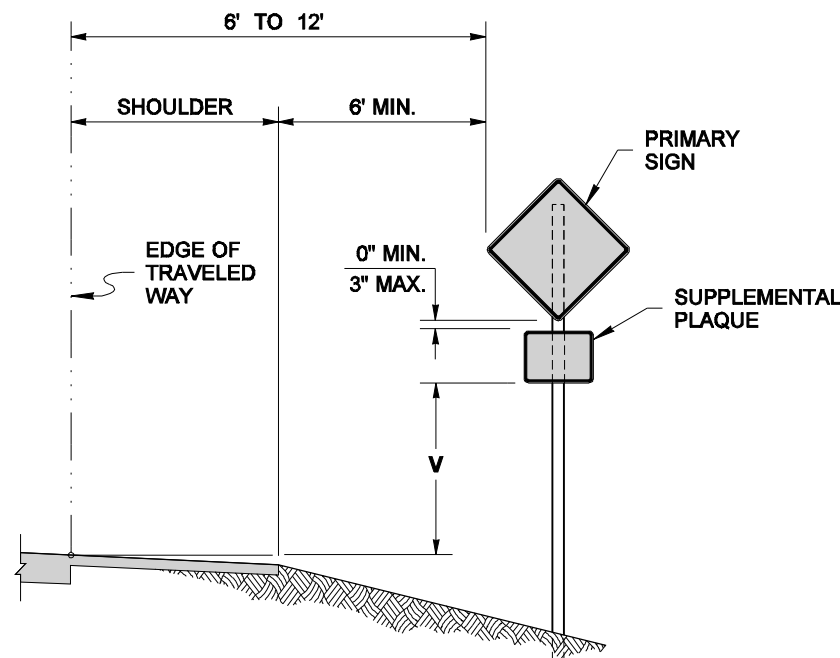

**SIGN WITH SUPPLEMENTAL
PLAQUE INSTALLATION
(FILL SECTION)**

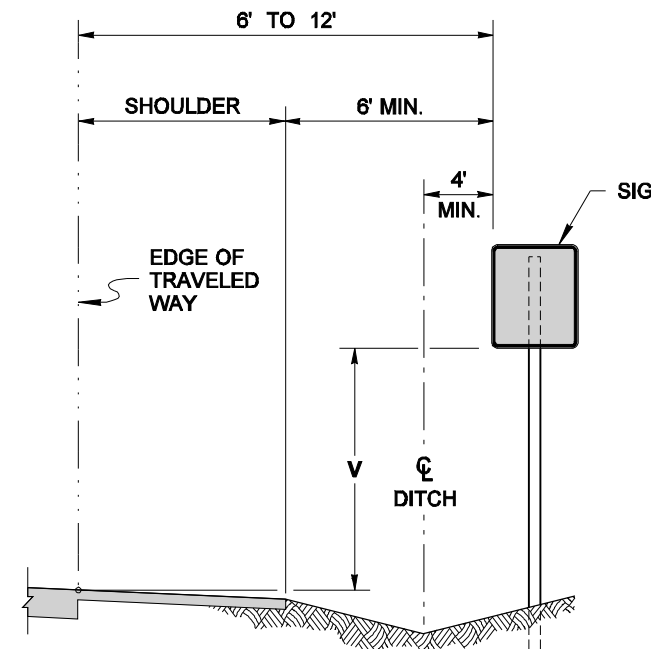

**SIGN INSTALLATION
(DITCH SECTION)**

NOTES

1. For sign installation details, see Std. Plan G - series.
2. In rural areas, the "V" Height can be a minimum of 7 feet for primary signs and 6 feet for the supplemental plaques for greater visibility, as directed by the engineer.
3. The "V" height for signs, with an area of more than 50 square feet and two or more sign supports, is 7 feet in both rural and urban areas.

HEIGHT V		
	TO BOTTOM OF SIGN (NO SUPPLEMENTAL PLAQUE)	TO BOTTOM OF SUPPLEMENTAL PLAQUE (WHEN REQUIRED)
RURAL	5' MINIMUM	4' MINIMUM
URBAN	7' MINIMUM	6' MINIMUM



EXPIRES AUGUST 9, 2007

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT UNTIL AN ELECTRONIC DIGITAL SIGNATURE IS APPLIED TO THE ORIGINAL AND APPROVED FOR PUBLICATION. IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

**CLASS A
CONSTRUCTION SIGNING
INSTALLATION
STANDARD PLAN K-80.10-00**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION

Ken L. Smith 02-21-07
STATE DESIGN ENGINEER DATE